

# DIN 85 sim. UNI 6108 EN ISO 1580

Vite a testa cilindrica bombata con intaglio

Slotted pan head screw


Disponibile/ Available



A4



A2

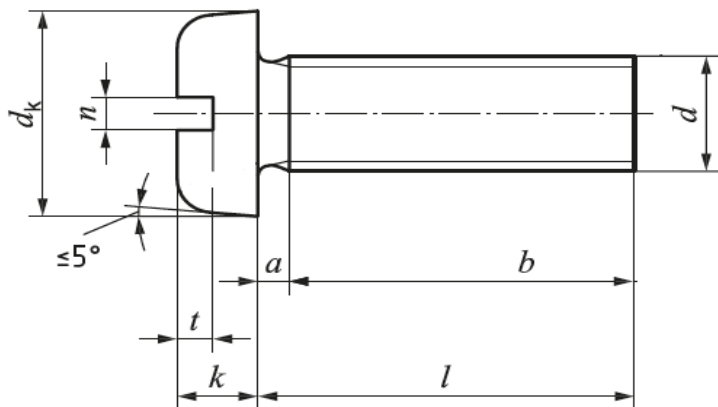

dk max	4	5	6	8	10	12	16
k	1,3	1,5	1,8	2,4	3	3,6	4,8
n	0,56/0,70	0,66/0,70	0,86/1,00	1,26/1,51	1,26/1,51	1,66/1,91	2,06/2,31
t	0,5	0,7	0,85	1	1,2	1,4	1,9
a	0,8	0,9	0,5	0,7	0,8	1	1,25
l/d	M2	M2,5	M3	M4	M5	M6	M8
4	2x4	2,5x4					
5	2x5	2,5x5	3x5				
6	2x6	2,5x6	3x6	4x6	5x6		
8	2x8	2,5x8	3x8	4x8	5x8	6x8	
10		2,5x10	3x10	4x10	5x10	6x10	
12		2,5x12	3x12	4x12	5x12	6x12	8x12
(14)			3x14	4x14	5x14	6x14	8x14
16			3x16	4x16	5x16	6x16	8x16
18			3x18	4x18	5x18	6x18	8x18
20			3x20	4x20	5x20	6x20	8x20
25			3x25	4x25	5x25	6x25	8x25
30			3x30	4x30	5x30	6x30	8x30
35			3x35	4x35	5x35	6x35	8x35
40			3x40	4x40	5x40	6x40	8x40
50				4x50	5x50	6x50	8x50
60						6x60	8x60
80							8x80

Le dimensioni tra parentesi dovrebbero essere evitate se possibile.

Sizes in parentheses should be avoided if possible.

last edit 02/07/2019

DRAWING N. 1060